

Improved message passing for inference in densely connected systems

Juan P. Neirotti and David Saad

The Neural Computing Research Group, Aston University, Birmingham B4 7ET, UK.

An improved inference method for densely connected systems is presented. The approach is based on passing condensed messages between variables, representing macroscopic averages of microscopic messages. We extend previous work that showed promising results in cases where the solution space is contiguous to cases where fragmentation occurs. We apply the method to the signal detection problem of Code Division Multiple Access (CDMA) for demonstrating its potential. A highly efficient practical algorithm is also derived on the basis of insight gained from the analysis.

Graphical models (Bayes belief networks) provide a powerful framework for modelling statistical dependencies between variables [1, 2, 3]. They play an essential role in devising a principled probabilistic framework for inference in a broad range of applications from medical expert systems, to decoders in telecommunication systems.

Message passing techniques are typically used for inference in graphical models that can be represented by a sparse graph with a few (typically long) loops. They are aimed at obtaining (pseudo) posterior estimates for the system's variables by iteratively passing messages (locally calculated conditional probabilities) between variables. Iterative message passing of this type is guaranteed to converge to the globally correct estimate when the system is tree-like; there are no such guarantees for systems with loops even in the case of large loops and a local tree-like structure (although message passing techniques have been used successfully in loopy systems, supported by some limited theory [4]). A clear link has been established between certain message passing algorithms and well known methods of statistical mechanics [5] such as the Bethe approximation [6, 7].

These inherent limitations seem to prevent the use of message passing techniques in densely connected systems due to their high connectivity, implying an exponentially growing cost, and an exponential number of loops. However, an exciting new approach has been recently suggested [8] for extending Belief Propagation (BP) techniques [1, 2, 3] to densely connected systems. In this approach, messages are grouped together, giving rise to a macroscopic random variable, drawn from a Gaussian distribution of varying mean and variance for each of the nodes. The technique has been successfully applied to signal detection in Code Division Multiple Access (CDMA) problems and the results reported are competitive with those of other state of the art techniques. However, the current approach has some inherent limitations [8], presumably due to its similarity to the replica symmetric solution in equivalent Ising spin models [9, 10].

In a separate recent development [11], the replica-symmetric-equivalent BP has been extended to Survey Propagation (SP), which corresponds to one-step replica symmetry breaking in diluted systems. This new algorithm, motivated by the theoretical physics interpretation of such problems, has been highly successful in solving hard computational problem [11], far beyond other

existing approaches. In addition, the algorithm facilitated theoretical studies of the corresponding physical system and contributed to our understanding of it [12].

Inspired by the extension of BP to SP we have extended the approach of [8], designed for inference in densely connected systems, in a similar manner to include an average over multiple pure states. In this article we derive this extension, apply it to the problem of CDMA signal detection [8] and devise a practical algorithm based on insight gained from the analysis. The approach is general and can be applied to a broad range of inference problems. However, for giving a specific example and highlighting the advantages with respect to the original method [8] we will focus here on the application to CDMA signal detection.

Multiple access communication refers to the transmission of multiple messages to a single receiver. The scenario we study here is that of K users transmitting independent messages over an additive white Gaussian noise (AWGN) channel of zero mean and variance σ_0^2 . Various methods are in place for separating the messages, in particular Time, Frequency and Code Division Multiple Access [13]. The latter, is based on spreading the signal by using K individual random binary spreading codes of spreading factor N . We consider the large-system limit, in which the number of users K tends to infinity while the system load $\beta \equiv K/N$ is kept to be $\mathcal{O}(1)$. We focus on a CDMA system using binary phase shift keying (BPSK) symbols and will assume the power is completely controlled to unit energy. The received aggregated, modulated and corrupted signal is of the form:

$$y_\mu = \frac{1}{\sqrt{N}} \sum_{k=1}^K s_{\mu k} b_k + \sigma_0 n_\mu$$

where b_k is the bit transmitted by user k , $s_{\mu k}$ is the spreading chip value, n_μ is the Gaussian noise variable drawn from $\mathcal{N}(0, 1)$, and y_μ the received message. The goal is to get an accurate estimate of the vector $\mathbf{b}$ for all users given the received message vector $\mathbf{y}$ by approximating the posterior $P(\mathbf{b}|\mathbf{y})$. A method for obtaining a good estimate of the posterior probability in the case where the noise level is accurately known has been presented in [8]. However, the calculation is based on finding a single solution and is therefore bound to fail, as have been observed, when the solution space becomes fragmented, for instance when the noise level is unknown, a case that

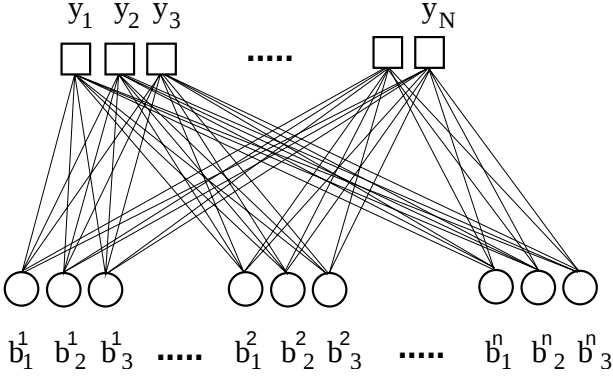


Figure 1: Replicated solutions $\mathbb{B} = (\mathbf{b}_1, \mathbf{b}_2, \dots, \mathbf{b}_K)$ given data.

arguably corresponds to replica symmetry breaking.

The reason for the failure in this case can be qualitatively understood by the same arguments as in the case of sparse graphs; the existence of competing solutions results in inconsistent messages and prevent the algorithm from converging to an accurate estimate. An improved solution can therefore be obtained by averaging over the different solutions, inferred from the same data, in a manner reminiscent to the SP approach, only that the messages in the current case are more complex.

Figure 1 shows the detection problem we aim to solve as a bipartite graph where $\mathbb{B} = (\mathbf{b}_1, \mathbf{b}_2, \dots, \mathbf{b}_K)$ the set of bit vectors, $\mathbf{b}_k = (b_k^1, b_k^2, \dots, b_k^n)$, where n is the solution (replica) index.

Using Bayes rule one obtains the BP equations:

$$\begin{aligned} P^{t+1}(y_\mu | \mathbf{b}_k, \{y_{\nu \neq \mu}\}) &= \hat{a}_{\mu k}^{t+1} \sum_{\mathbf{b}_l \neq \mathbf{b}_k} P(y_\mu | \mathbb{B}) \\ &\quad \times \prod_{l \neq k} P^t(\mathbf{b}_l | \{y_{\nu \neq \mu}\}) \\ P^t(\mathbf{b}_l | \{y_{\nu \neq \mu}\}) &= a_{\mu k}^t \prod_{\nu \neq \mu} P^t(y_\nu | \mathbf{b}_l, \{y_{\sigma \neq \nu}\}) \end{aligned} \quad (1)$$

where $\hat{a}_{\mu k}^{t+1}$ and $a_{\mu k}^t$ are normalization constants. For calculating the posterior

$$P(\mathbb{B} | \mathbf{y}) = \frac{\prod_{\mu=1}^N P(y_\mu | \mathbb{B})}{\text{Tr}_{\{\mathbb{B}\}} \prod_{\mu=1}^N P(y_\mu | \mathbb{B})}, \quad (2)$$

an expression representing the likelihood is required and is easily derived from the noise model (assuming zero mean and variance σ^2)

$$P(y_\mu | \mathbb{B}) = \frac{1}{\sqrt{2\pi\sigma^2}} \exp \left\{ -\frac{(\mathbf{y}_\mu - \Delta_\mu)^\top \mathbb{I} (\mathbf{y}_\mu - \Delta_\mu)}{2\sigma^2} \right\}, \quad (3)$$

where $\mathbf{y}_\mu = y_\mu \mathbf{u}$ and $\mathbf{u}^\top \equiv \overbrace{(1, 1, \dots, 1)}^n$

$$\Delta_\mu \equiv \frac{1}{\sqrt{N}} \sum_{k=1}^K s_{\mu k} \mathbf{b}_k.$$

An explicit expression for inter-dependence between solutions is required for obtaining a closed set of update equations. We assume a dependence of the form

$$P^t(\mathbf{b}_k | \{y_{\nu \neq \mu}\}) \propto \exp \left\{ \mathbf{h}_{\mu k}^{t\top} \mathbf{b}_k + \frac{1}{2} \mathbf{b}_k^\top \mathbb{Q}_{\mu k}^t \mathbf{b}_k \right\}, \quad (4)$$

where $\mathbf{h}_{\mu k}^t$ is a vector representing an external field and $\mathbb{Q}_{\mu k}^t$ the matrix of cross-replica interaction. Furthermore, we assume the following symmetry between replica:

$$\begin{aligned} (\mathbb{Q}_{\mu k}^t)^{ab} &= \delta^{ab} q_{\mu k}^t + (1 - \delta^{ab}) p_{\mu k}^t \\ \mathbf{h}_{\mu k}^t &= h_{\mu k}^t \mathbf{u}. \end{aligned} \quad (5)$$

An expression for equation (4) immediately follows

$$\begin{aligned} P^t(\mathbf{b}_k | \{y_{\nu \neq \mu}\}) &= [\mathcal{Z}_{\mu k}^t]^{-1} \\ &\quad \times \exp \left\{ h_{\mu k}^t \sum_{a=1}^n b_k^a + \frac{1}{2} p_{\mu k}^t \left(\sum_{a=1}^n b_k^a \right)^2 \right\}, \end{aligned} \quad (6)$$

where $\mathcal{Z}_{\mu k}^t$ is a normalization constant.

We expect the free energy obtained from the well behaved distribution P^t to be self-averaging, thus

$$\lim_{n \rightarrow \infty} \frac{1}{n} \log \left(\overline{\mathcal{Z}_{\mu k}^t} \right) = \lim_{n \rightarrow \infty} \frac{1}{n} \log \left(\mathcal{Z}_{\mu k}^t (h_{\mu k}^t, q_0, p_0) \right),$$

where the sub-index 0 represents the mean value of the parameters when extracted for some suitable distributions and the overline represents the mean value of the partition function over such distributions.

To obtain the scaling behavior of the various parameters we calculate $\mathcal{Z}(h, q, p)$ explicitly, assuming the parameters q and p are taken from normal distributions $\mathcal{N}_q(q_0, \sigma_q^2)$ and $\mathcal{N}_p(p_0, \sigma_p^2)$. After a long calculation one obtains the following scaling: $h \sim \mathcal{O}(1)$, $q_0 \sim \mathcal{O}(1)$, $p_0 \sim \mathcal{O}(n^{-1})$, $\sigma_q^2 \sim \mathcal{O}(n^{-1})$, and $\sigma_p^2 \sim \mathcal{O}(n^{-3})$. In the remainder of the paper we will rescale the off-diagonal elements of $\mathbb{Q}_{\mu k}^t$ to $g_{\mu k}^t/n$, where $g_{\mu k}^t \sim \mathcal{O}(1)$.

The marginalized posterior at time t takes the form

$$\begin{aligned} P^t(\mathbf{b}_k | \{y_{\nu \neq \mu}\}) &= \frac{\int_{-\infty}^{\infty} dx \exp \left\{ -n \frac{(x - h_{\mu k}^t)^2}{2g_{\mu k}^t} + x \sum_{a=1}^n b_k^a \right\}}{\int_{-\infty}^{\infty} dx \exp \left\{ -n \Phi(x; h_{\mu k}^t, g_{\mu k}^t) \right\}} \\ \Phi(x; h_{\mu k}^t, g_{\mu k}^t) &= -\frac{(x - h_{\mu k}^t)^2}{2g_{\mu k}^t} + \ln(\cosh(x)). \end{aligned} \quad (7)$$

To find the dominant solutions in the case of large n one studies the maxima of $\Phi(x; h, g)$. One identifies regimes with a single and double peaks, depending on the values of h and g (full details will be given elsewhere); the main contribution comes from a regime where $g_{\mu k}^t > 1$ and $0 < h_{\mu k}^t/g_{\mu k}^t \ll 1$, where $\Phi(x; h, g)$ takes the form of an almost symmetric pair of Gaussians located at

$$x_{\pm, \mu k}^t \simeq \pm x_{0, \mu k}^t + \frac{g_{\mu k}^t}{g_{\mu k}^t + (x_{0, \mu k}^t)^2 - (g_{\mu k}^t)^2} h_{\mu k}^t, \quad (8)$$

where $\pm x_0$ are the positions of the peaks at zero field.

To calculate correlation between replica we expand $P(y_\mu | \mathbb{B})$ in the large N limit (Eq. 3), as in [8], to obtain

$$P(y_\mu | \mathbb{B}) \simeq \left(\frac{\exp(-1/2N\sigma^2)}{\sqrt{2\pi\sigma^2}} \right)^n \quad (9)$$

$$\times \exp \left\{ -\frac{(\mathbf{y}_\mu - \Delta_{\mu k})^\top \mathbb{I} (\mathbf{y}_\mu - \Delta_{\mu k})}{2\sigma^2} \right\}$$

$$\times \left[1 + \frac{s_{\mu k}}{\sqrt{N}\sigma^2} (\mathbf{y}_\mu - \Delta_{\mu k})^\top \mathbf{b}_k \right],$$

where $\Delta_{\mu k} = \frac{1}{\sqrt{N}} \sum_{l \neq k} s_{\mu l} \mathbf{b}_l$.

For large n and small field we obtain the following

$$\begin{aligned} \langle b_k^a \rangle &= \text{Tr}_{\{\mathbf{b}_k\}} P^t(\mathbf{b}_k | \{y_{\nu \neq \mu}\}) b_k^a \\ &\simeq a_{+, \mu k}^t \tanh(x_{+, \mu k}^t) + a_{-, \mu k}^t \tanh(x_{-, \mu k}^t) \\ \langle b_k^a b_k^b \rangle &= \text{Tr}_{\{\mathbf{b}_k\}} P^t(\mathbf{b}_k | \{y_{\nu \neq \mu}\}) b_k^a b_k^b \\ &\simeq a_{+, \mu k}^t \tanh(x_{+, \mu k}^t)^2 + a_{-, \mu k}^t \tanh(x_{-, \mu k}^t)^2, \\ \langle b_k^a b_l^b \rangle &= \langle b_k^a \rangle \langle b_l^b \rangle. \end{aligned} \quad (10)$$

where $m_{\mu k}^t \equiv \tanh(x_{0, \mu k}^t) \equiv x_{0, \mu k}^t / g_{\mu k}^t$, and

$$a_{\pm, \mu k}^t \simeq \frac{\exp\{\mp n m_{\mu k}^t h_{\mu k}^t\}}{\exp\{n m_{\mu k}^t h_{\mu k}^t\} + \exp\{-n m_{\mu k}^t h_{\mu k}^t\}}. \quad (11)$$

Using Eqs. (10) we calculate the first two cummulants of the elements of $\Delta_{\mu k}$:

$$\langle \Delta_{\mu k}^a \rangle = \frac{1}{\sqrt{N}} \sum_{l \neq k} s_{\mu l} m_{\mu l}^t \quad (12)$$

$$\begin{aligned} (\chi_{\mu k}^t)^{ab} &\equiv \langle \Delta_{\mu k}^a \Delta_{\mu k}^b \rangle - \langle \Delta_{\mu k}^a \rangle \langle \Delta_{\mu k}^b \rangle \\ &= \delta^{ab} \beta (1 - Q_{\mu k}^t) + (1 - \delta^{ab}) \beta R_{\mu k}^t, \end{aligned}$$

where $Q_{\mu k}^t$ and $R_{\mu k}^t$ can be approximated using the law of large numbers as

$$\begin{aligned} Q_{\mu k}^t &\equiv \frac{1}{K} \sum_{l \neq k} (a_{+, \mu k}^t \tanh(x_{+, \mu k}^t) + a_{-, \mu k}^t \tanh(x_{-, \mu k}^t))^2 \\ &\simeq \frac{1}{K} \sum_{l \neq k} (m_{\mu k}^t)^2 \\ R_{\mu k}^t &\equiv \frac{1}{K} \sum_{l \neq k} a_{+, \mu k}^t a_{-, \mu k}^t (\tanh(x_{+, \mu k}^t) - \tanh(x_{-, \mu k}^t))^2 \\ &\simeq \frac{4}{K} \sum_{l \neq k} a_{+, \mu k}^t a_{-, \mu k}^t (m_{\mu k}^t)^2 \equiv \frac{1}{n} \Upsilon_{\mu k}^t. \end{aligned}$$

The definition of $\Upsilon_{\mu k}^t$ relies on the expected scaling of the off-diagonal terms of the matrix $\chi_{\mu k}^t$.

Thus, we expect the variables $\Delta_{\mu k}$ to obey a Gaussian distribution defined in Eqs.(13). The mean value of b_k^a at time $t+1$ is then given by:

$$\begin{aligned} \hat{m}_{\mu k}^{t+1} &= (\sigma^2 + \beta(1 - Q_{\mu k}^t) + \beta \Upsilon_{\mu k}^t)^{-1} \\ &\quad \left(\frac{y_\mu s_\mu}{\sqrt{N}} - \beta (\mathbb{P}_\mu - \mathbb{I}/K) \mathbf{m}_\mu^t \right)_k, \end{aligned} \quad (13)$$

where $\mathbb{P}_\mu \equiv (1/K) s_{\mu k} s_{\mu l}$ and $\mathbb{I} \equiv \delta_{kl}$, respectively. We assume that the macroscopic variables are self averaging and omit the μ, k indices.

The main difference between Eq. (13) and the equivalent equation in [8] is the emergence of an extra term in the prefactor, $\beta \Upsilon^t$, reflecting correlations between different solutions groups (replica). To determine this term we optimize the choice of Υ^t by minimizing the bit error at each time step. Following [8] we define

$$M^t \equiv \frac{1}{NK} \sum_{\mu=1}^N \sum_{k=1}^K b_k m_{\mu k}^t = \int \mathcal{D}z \tanh(\sqrt{F^t} z + E^t) \quad (14)$$

$$Q^t \equiv \frac{1}{NK} \sum_{\mu=1}^N \sum_{k=1}^K (b_k m_{\mu k}^t)^2 = \int \mathcal{D}z \tanh^2(\sqrt{F^t} z + E^t),$$

where $\mathcal{D}z \equiv dz \exp[-z^2/2] / \sqrt{2\pi}$ and

$$\begin{aligned} E^{t+1} &\equiv \frac{1}{K} \sum_{\mu=1}^N \sum_{k=1}^K b_k \hat{m}_{\mu k}^{t+1} = \frac{1}{\sigma^2 + \beta(1 - Q^t + \Upsilon^t)} \\ F^{t+1} &\equiv \sum_{\mu=1}^N \left[\frac{1}{K} \sum_{k=1}^K (b_k \hat{m}_{\mu k}^{t+1})^2 - \frac{1}{K^2} \left(\sum_{k=1}^K b_k \hat{m}_{\mu k}^{t+1} \right)^2 \right] \\ &\simeq \frac{1}{K} \sum_{\mu=1}^N \hat{\mathbf{m}}_\mu^{t+1} \cdot \hat{\mathbf{m}}_\mu^{t+1} \\ &= [\beta(1 - 2M^t + Q^t) + \sigma_0^2] (E^{t+1})^2, \end{aligned} \quad (15)$$

To obtain the bit error rate:

$$P_b^t \equiv \frac{1}{2K} \sum_{k=1}^K (b_k - \text{sgn}(m_k^t)) = \int_{-\infty}^{-E^t/\sqrt{F^t}} \mathcal{D}z \quad (16)$$

$$\text{with } m_k^t \simeq \tanh\left(\sum_{\mu=1}^N \hat{m}_{\mu k}^t\right). \quad (17)$$

Optimizing P_b^t with respect to Υ^t one obtains straightforwardly that $E^t = F^t$ and $Q^t = M^t$. In principle, the optimization can be done globally [14] but is of a limited practical value.

This implies that $\Upsilon^t = (\sigma_0^2 - \sigma^2)/\beta$ is just a constant. However, it holds the key to obtaining accurate inference results. If the noise estimate is identical to the true noise the term vanishes and one retrieves the expression of [8]; otherwise, an estimate of the difference between the two noise values is required for computing E^t .

From equation (15) one obtains:

$$\begin{aligned} E^{t+1} &\simeq \frac{1}{K} \sum_{\mu=1}^N \hat{\mathbf{m}}_\mu^{t+1} \cdot \hat{\mathbf{m}}_\mu^{t+1} \\ &= \left[\frac{1}{\sigma^2 + \beta(1 - Q^t + \Upsilon^t)} \right]^2 \left[\frac{1}{N} \sum_{\mu=1}^N y_\mu^2 - \beta(2M^t - Q^t) \right] \\ &= (E^{t+1})^2 \left[\frac{1}{N} \sum_{\mu=1}^N y_\mu^2 - \beta Q^t \right] = \left[\frac{1}{N} \sum_{\mu=1}^N y_\mu^2 - \beta Q^t \right]^{-1}. \end{aligned} \quad (18)$$

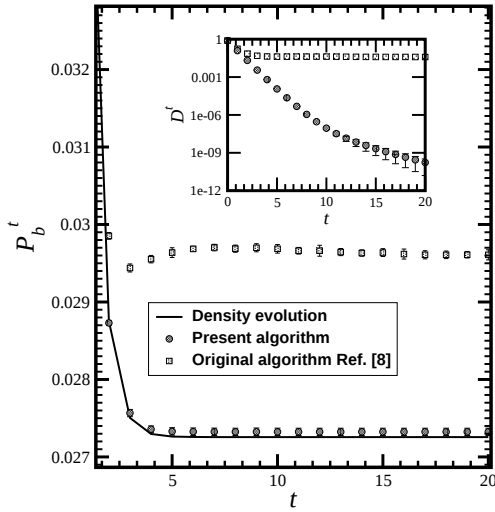


Figure 2: Error probability of the inferred solution evolving in time. The system load $\beta = 0.25$, true noise level $\sigma_0^2 = 0.25$ and estimated noise $\sigma^2 = 0.01$. Squares represent results of the original algorithm [8], solid line the dynamics obtained from our equations; circles represent results obtained from the suggested *practical* algorithm. Variances are smaller than the symbol size. In the inset, D^t , a measure of convergence in the obtained solutions, as a function of time; symbols are as in the main figure.

This enables us to rewrite Eq.(13) as

$$\hat{m}_{\mu k}^{t+1} = A^t \left(\frac{y_{\mu} s_{\mu}}{\sqrt{N}} - \beta (\mathbb{P}_{\mu} - K^{-1} \mathbb{I}) \mathbf{m}_{\mu}^t \right)_k \quad (19)$$

$$A^t = \left\{ \frac{1}{N} \sum_{\mu=1}^N y_{\mu}^2 - \beta Q^t \right\}^{-1}$$

where no estimate on σ_0 is required.

The inference algorithm requires an iterative update of Eqs.(18,19,17) and converges to a reliable estimate of the signal, with no need for an accurate prior information of the noise level. The computational complexity of the algorithm is of $\mathcal{O}(K^2)$.

To test the performance of our algorithm we carried out a set of experiments of CDMA signal detection problem under typical conditions. Error probability of the inferred signals has been calculated for a system load of $\beta = 0.25$, where the true noise level is $\sigma_0^2 = 0.25$ and the estimated noise is $\sigma^2 = 0.01$, as shown in Figure 2. The solid line represents the expected theoretical results (density evolution), knowing the exact values of σ_0^2 and σ^2 , while circles represent simulation results obtained via the suggested *practical* algorithm, where no such knowledge is assumed. The results presented are based on 10^5 trials per point and a system size $N = 2000$ and are superior to

those obtained using the original algorithm [8].

Another performance measure one should consider is

$$D^t \equiv \frac{1}{K} (\mathbf{m}^t - \mathbf{m}^{t-1}) \cdot (\mathbf{m}^t - \mathbf{m}^{t-1}),$$

that provides an indication to the stability of the solutions obtained. In the inset of Figure 2 we see that results obtained from our algorithm show convergence to a reliable solution in stark contrast to the original algorithm [8]. The physical interpretation of the difference between the two results is assumed to be related to a replica symmetry breaking phenomena.

In summary, we present a new algorithm for using belief propagation in densely connected systems that enables one to obtain reliable solutions even when the solution space is fragmented. It represents an extension to existing algorithms of that type which is reminiscent to the extension of BP to SP. The algorithm has been tested on the signal detection problem in CDMA and has provided superior results to other existing algorithms [8, 15]. Further research is required to fully determine the potential of the new algorithm.

Support from the EU FP-6 EVERGROW IP is gratefully acknowledged.

-
- [1] J. Pearl, *Probabilistic Reasoning in Intelligent Systems*, Morgan Kaufmann Publishers, San Francisco, CA (1988)
 - [2] F.V. Jensen, *An Introduction to Bayesian Networks*, UCL Press, London (1996)
 - [3] D.J.C. MacKay, *Information Theory, Inference and Learning Algorithms*, Cambridge University Press (2003)
 - [4] Y. Weiss *Neural Computation* **12** 1 (2000)
 - [5] M. Oppor and D. Saad, *Advanced Mean Field Methods: Theory and Practice*, MIT Press, Cambridge, MA 2001
 - [6] Y. Kabashima, D. Saad, *Europhys. Lett.* **44** 668 (1998)
 - [7] J.S. Yedidia, W.T. Freeman and Y. Weiss, in *Advances in Neural Information Processing Systems* **13** 698 (2000)
 - [8] Y. Kabashima, *J. Phys. A* **36** 11111 (2003)
 - [9] M. Mézard, G. Parisi and M.A Virasoro, *Spin Glass Theory and Beyond*, World Scientific, Singapore (1987)
 - [10] H. Nishimori, *Statistical Physics of Spin Glasses and Information Processing*, Oxford University Press UK (2001)
 - [11] M. Mézard, G. Parisi and R. Zecchina, *Science* **297** 812 (2002)
 - [12] M. Mézard and R. Zecchina *Phys. Rev. E* **66** 056126 (2002)
 - [13] S. Verdú, *Multiuser Detection*, Cambridge University Press UK (1998)
 - [14] D. Saad and M. Rattay, *Phys. Rev. Lett.* **79** 2578 (1997)
 - [15] In preparing the manuscript we have found that a similar activity is being carried out by Yoshiyuki Kabashima at TITECH. However, in the absence of details we cannot comment on his approach.